



LANDA[®]
PRESSURE WASHERS

North America's **LARGEST** Manufacturer of
Industrial **PRESSURE WASHERS**

ENG

Stationary, Natural Gas-Heated Hot Water Pressure Washer

- Up to 8 GPM, 3000 PSI
- Belt-Driven LANDA Pump with 5-Year Warranty
- Schedule 80 Coil
- Optional Remote Stations
- LP Conversion Option



▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; notched, heat-reducing, "V" cogged belts connect the motor to the rugged **LANDA High-Pressure Pump** with three ceramic plungers, a forged brass head and a unique design that results in lower RPM than comparable pumps for less maintenance and a longer life. The Landa Pump also is backed by a five-year warranty.

■ Brass, anti-syphon **Detergent Metering Valve** locks out air and dispenses precise amount of cleaning agent.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.

■ **Consolidated Plumbing** means both the water supply inlet and the quick-couple, high-pressure outlet are next to each other for ease of installation.


■ Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.

■ Rugged **Steel Cabinet**, with vented panels, is painted with an epoxy powder-coat finish for all-weather protection.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for owner and operator protection.

■ Industrial grade overload protected **Control Switches** provide years of reliable performance.

■ High-efficiency burner, with fused transformer, has **Millivolt Ignition** with standing pilot light; electronic ignition is optional.

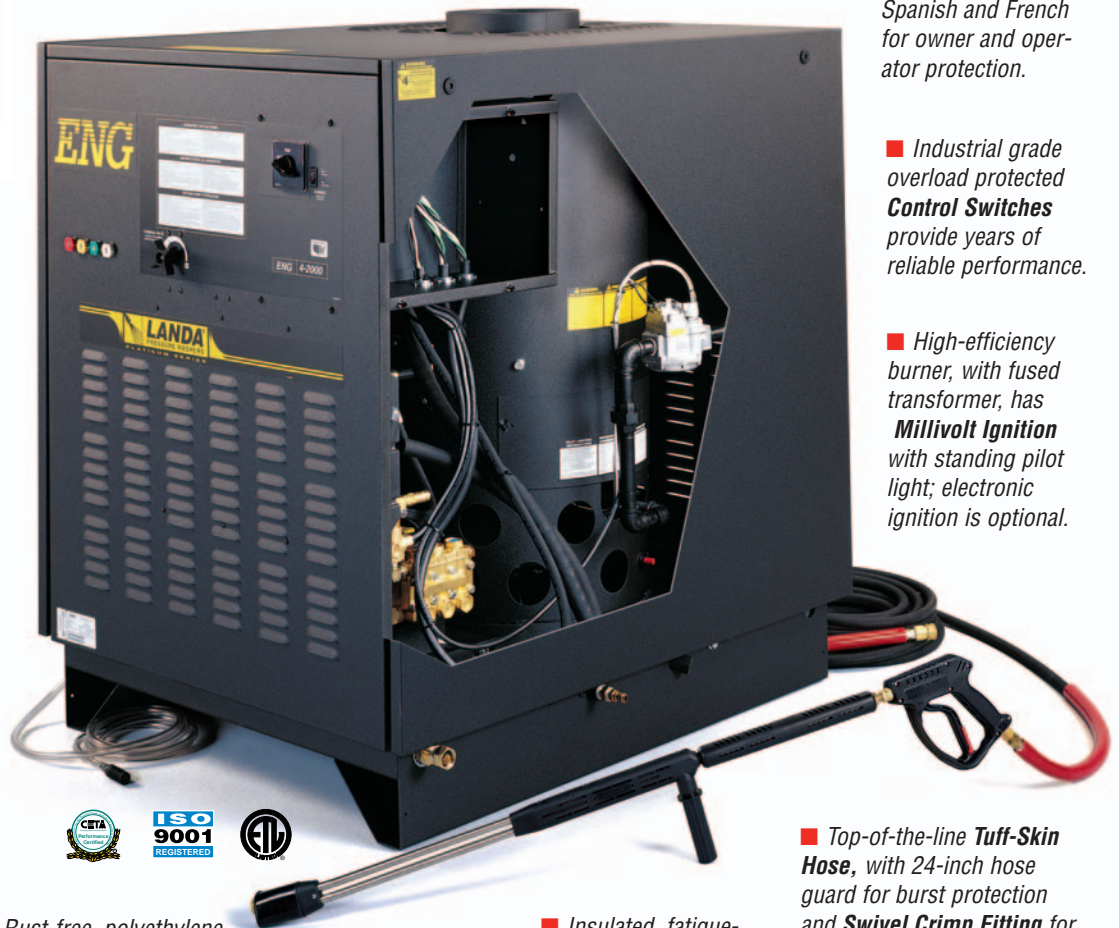

■ Rust-free, polyethylene **Float Tank** with stainless steel inlet filter and low-turbulence float valve allows for high-pressure application of detergent.

■ Industrial-duty **Electric Motor** with multiple voltage options and thermal overload protection.

■ Many **Safety Features**, including a rupture disk and thermal pump protector to prevent the build up of excessive pressures or heat.

■ Insulated, fatigue-free **Trigger Gun** with chrome-plated, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

■ Top-of-the-line **Tuff-Skin Hose**, with 24-inch hose guard for burst protection and **Swivel Crimp Fitting** for twist-free operation, has seven times the abrasion resistance as other high-pressure hoses

www.landa.com



North America's **LARGEST** Manufacturer of
Industrial **PRESSURE WASHERS**

ENG

*Stationary, Natural Gas-Heated
Hot Water Pressure Washer*

- Up to 8 GPM, 3000 PSI
- Belt-Driven LANDA Pump with 5-Year Warranty
- Schedule 80 Coil
- Optional Remote Stations
- LP Conversion Option



WHY CHOOSE THE ENG

The ENG is a super duty, natural gas heated hot water pressure washer capable of delivering up to 8 GPM and 3000 PSI of cleaning power as well as being flexible enough to support up to four optional remote operating stations.

EFFICIENT: Along with a super-efficient burner, with Robertshaw Millivolt Ignition, the ENG features an energy-efficient vertical heating coil made of Schedule 80 pipe and cold rolled for years of leak-free operation.

QUALITY: The ENG boasts many of the industrial-grade components and safety features that have set apart *LANDA* pressure washers as the most dependable and safe in the industry. Besides being certified to the rigid UL-1776 safety standards for pressure washers, the ENG is manufactured in a state-of-the-art plant certified to ISO-9001 quality manufacturing procedures. Furthermore, the ENG is housed in an attractive, but rugged, steel cabinet that is epoxy powder coated for all-weather protection. The motor and *LANDA* pump are vibration isolated from the frame for fatigue resistance.

ENG Specifications

Part No.	GPM	PSI	Voltage	Amps	HP	Pump	Pump RPM	BTU	SHIP WT.
ENG4-20024A	4.0	2200	230V 1ph	27	6	Belt Drive	835	400,000	1000 lbs.
ENG4-20024B	4.0	2200	230V 3ph	16	6	Belt Drive	835	400,000	880 lbs.
ENG4-20024C*	4.0	2200	460V 3ph	7	6	Belt Drive	835	400,000	880 lbs.
ENG4-30024A	4.0	3000	230V 1ph	36	8	Belt Drive	775	400,000	1060 lbs.
ENG4-30024B	4.0	3000	230V 3ph	25	8	Belt Drive	775	400,000	1055 lbs.
ENG4-30024C*	4.0	3000	460V 3ph	15	8	Belt Drive	775	400,000	1055 lbs.
ENG6-30024B	6.0	3000	230V 3ph	39	15	Belt Drive	1560	565,000	1,800 lbs.
ENG6-30024C*	6.0	3000	460V 3ph	19	15	Belt Drive	1560	565,000	1,800 lbs.
ENG8-30024B	8.0	3000	230V 3ph	52	20	Belt Drive	1375	750,000	1,835 lbs.
ENG8-30024C	8.0	3000	230V 3ph	26	20	Belt Drive	1375	750,000	1,835 lbs.

* Also available are models configured to 208V and/or 575V; ask your *LANDA* Dealer for details



Distributed by:

OPTIONS:

Part No.	Description
7-7SVLPKIT	LP Gas Conversion Kit (for models up to 4 GPM)
7-7LVLPKIT	LP Gas Conversion Kit (for models over 4 GPM)
30-466	Electronic Ignition

These options are also available through your *LANDA* Dealer:

- Remote Operating Stations (up to 4 stations)
- Automatic Start / Stop
- Time-Delay Shutdown

www.landa.com