

## LANDA Gun

Designed exclusively for *LANDA* to meet the demands of the high pressure cleaning professional.



- Original *LANDA* OEM Gun
- Heavy-duty, yet ergonomic design
- 5000 psi, 10 GPM
- 3/8" FPT inlet x 1/4" FPT outlet

**LANDA 5000 psi**

GPM	PSI	Temp	Description	Part No.
10	5000	320°F	<i>LANDA</i> Gun	4-01212
			Repair Kit	12-30203124

## Giant Gun

Heavy-duty gun for industrial applications. Fatigue free easy pull trigger.



- 21290-C Gun
- Reinforced plastic handle
- Brass valve housing
- Brass outlet tube
- 3/8" FPT inlet x 1/4" FPT outlet

**21290**

GPM	PSI	Temp	Description	Part No.
10	5000	300°F	21290-C	81-21250
			Repair Kit	81-21227

## J.E. Adams Gun

With its vented handle, this gun stays cool even when used with hot water.



- Adams 5030 Gun
- Plastic handle
- Forged brass housing
- 3/8" FPT inlet x 1/4" FPT outlet

**5030**

GPM	PSI	Temp	Description	Part No.
12	4500	300°F	Adams 5030	85-5030
			Repair Kit	85-5044

## General Guns

General Pump shutoff guns offer dependable service and quality you've come to expect.



- 5000 psi
- Insulated handle
- 10 GPM
- 3/8" FPT inlet x 1/4" FPT outlet

**YG 5000**

GPM	PSI	Temp	Description	Part No.
10	5000	320°F	YG5000	4-01211
			Repair Kit	1-YKITG4001

- YG300D Dump Gun
- Eliminates need for unloader valve
- Complete with 40" wand
- Safety relief valve required



**YG300D**

GPM	PSI	Temp	Description	Part No.
10.5	2750	140°F	Dump Gun, 40" Wand	4-01218

Front entry gun, great for hobby unit replacement.



- Fits *LANDA* ZF unit
- 1/4" FPT inlet x 1/4" FPT outlet

**LANDA ZF**

GPM	PSI	Temp	Description	Part No.
10.5	3000	280°F	<i>LANDA</i> ZF Gun	4-012191
			Metric Inlet Nipple	1-93668500

## Suttner Guns

Heavy-duty handle built to handle the pressure of rough daily use.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 4000 psi
- Max. 300°F
- Max. 12GPM
- Heavy-duty construction
- Fully rebuildable, cartridge-type valve assembly

**ST-2000**

GPM	PSI	Temp	Description	Part No.
12	4000	300°F	ST 2000	4-01203
			Repair Kit	84-202000044

15° offset angle thru gun for easier overhead use.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 4000 psi
- Max. 300°F
- Max. 12 GPM
- Horizontal flow-through design
- Fully rebuildable, cartridge-type valve assembly

**ST-601**

GPM	PSI	Temp	Description	Part No.
12	4000	300°F	ST 601	4-01204
			Repair Kit	84-202000044

Requires half the effort to hold closed because of the "easy pull" design.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 5000 psi
- Max. 300°F
- Max. 12 GPM
- Heavy-duty construction
- A true "Easy-Pull" trigger design

**ST-2305**

GPM	PSI	Temp	Description	Part No.
12	5000	300°F	ST 2305	4-01922
			Repair Kit	84-202300490

High pressures and fatigue free "relax action" design.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 5000 psi
- Max. 300°F
- Max. 12 GPM
- A true "Relax-Action" trigger design

**ST-2605**

GPM	PSI	Temp	Description	Part No.
12	5000	300°F	ST 2605	4-01223
			Repair Kit	84-202700490

## Suttner Guns (continued)

### "Stainless Steel"



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 4500 psi
- Max. 300°F
- Max. 12 GPM
- A true "Relax-Action" trigger design
- Chemical resistant all stainless steel construction

**ST-2700SS**

GPM	PSI	Temp	Description	Part No.
12	4500	300°F	ST 2700 SS	4-01224
			Repair Kit	84-202700490

Suttner's most popular shutoff gun.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 4000 psi
- Max. 300°F
- Max. 12 GPM

**ST-1500**

GPM	PSI	Temp	Description	Part No.
12	4000	300°F	ST 1500	4-01205
			Repair Kit	84-202000044

Economical and ergonomic, powerful enough to handle 3000 psi.



- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 3000 psi
- Max. 300°F
- Max. 7 GPM

**ST-1100**

GPM	PSI	Temp	Description	Part No.
7	3000	300°F	ST 1100	4-01209
			Repair Kit	84-999000020

Open spray grip without trigger.




- 3/8" FPT inlet x 1/4" FPT outlet
- Max. 300°F
- Low pressure, trigger-less spray gun

**ST-1500H**

GPM	PSI	Temp	Description	Part No.
10	Low	300°F	Open Spray Grip	4-01202

## LANDA Variable Pressure Wands

The LANDA Stainless Steel Variable pressure wand simply out classes the competition. 41" length to meet ETL Standards plus 1/4" Stainless Steel tubes provide superior look and durability. Designed specifically for LANDA to our specifications.

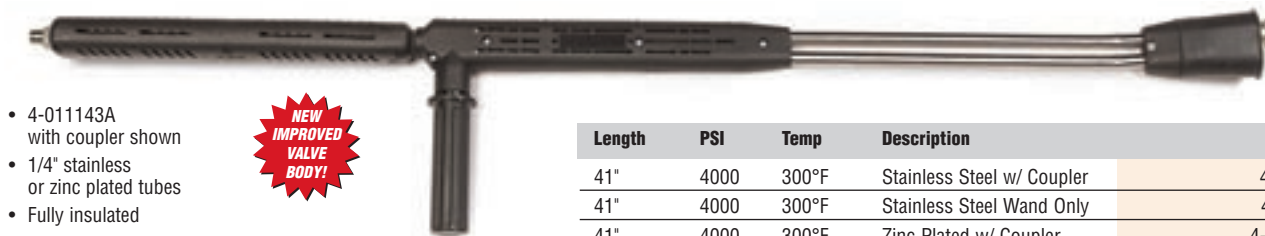

- 4-011143A with coupler shown
- 1/4" stainless or zinc plated tubes
- Fully insulated
- New improved brass valve body and Stainless Steel valve bushing



Length	PSI	Temp	Description	Part No.
41"	4000	300°F	Stainless Steel w/ Coupler	4-011143A
41"	4000	300°F	Stainless Steel Wand Only	4-0111391
41"	4000	300°F	Zinc Plated w/ Coupler	4-0111351A
41"	4000	300°F	Zinc Plated Wand Only	4-011135
			Repair Kit	83-SSVPKIT

## General ZZDBL Variable Pressure Wands

1/8" zinc plated tubes, available with coupler and soap nozzle or order wand only.



- 4-011142A wand with coupler shown
- Stainless seat and stem
- Insulated handle
- 1/8" zinc plated steel tubes

Length	PSI	Temp	Description	Part No.
36"	3000	284°F	w/ Coupler/Soap Nozzle	4-011142A
36"	3000	284°F	Wand Only	4-011139
72"	3000	284°F	w/ Coupler/Soap Nozzle	4-0111421
72"	3000	284°F	Wand Only	4-0111412
			Repair Kit	1-VPKIT

## Steam Wand

Designed for use with the LANDA Hot 3-300 Steamer unit. Completely insulated for maximum protection.




- 4-01111 wand with steam nozzle shown
- Vented grip full length of wand

Length	PSI	Temp	Description	Part No.
48"	4000	320°F	w/ Steam Nozzle	4-01111
48"	4000	320°F	w/o Steam Nozzle	4-01110

## 5650 PSI Gun & Wand

High pressure and heat protection are featured in this gun with 47" stainless steel wand.

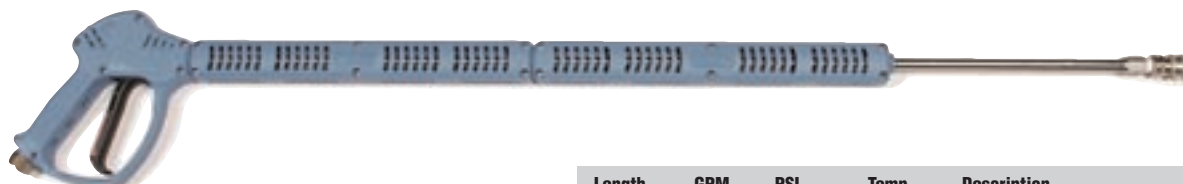

Length	GPM	PSI	Temp	Description	Part No.
47"	8	5650	320°F	Gun & Wand w/ Coupler	4-01219A
47"	8	5650	320°F	Gun w/ Wand	4-01219

## Insulated Wands

LANDA Quality through and through. Superior heat protection with stainless steel tube construction. Available in stainless steel and zinc plated with vented grips or with molded plastic grip as shown below.



- 4-0111021 35.5" wand with vented grip and coupler, stainless steel shown
- Vented insulated grip

Length	PSI	Temp	Description	Part No.
35.5"	4000	300°F	Vented Grip w/ Coupler, SS	4-0111021
35.5"	4000	300°F	Vented Grip, SS, Wand only	4-01114230
72"	4000	300°F	Plated, Vented Grip w/ Coupler	4-011062
72"	4000	300°F	Plated, Vented Grip, Wand only	4-0111427



- 4-0111434 36" molded grip wand shown
- Insulated cover protects user from hot water
- Plated steel pipe

Length	PSI	Temp	Description	Part No.
24"	4000	320°F	Molded Grip, Waterjet Wand	4-0110520
36"	4000	300°F	Molded Grip	4-0111434
48"	4000	300°F	Molded Grip	4-0111435

## Cold Water Wands

Made of 304 Stainless Steel for long lasting durability. As shown below, the 4-0110410 31" wand also has a highly visible yellow safety cover and coupler.



4-011053



4-0110410

- High visibility yellow protective cover (4-0110410 only)
- Stainless steel 1/4" pipe

Length	PSI	Temp	Description	Part No.
31"	4000	Cold	Covered w/ Coupler	4-0110410
31"	4000	Cold	Pipe only	4-011053
40"	4000	Cold	Pipe w/ Coupler	4-0110540
40"	4000	Cold	Pipe only	4-011054
72"	4000	Cold	Pipe w/ Coupler	4-011061
72"	4000	Cold	Pipe only	4-0111321

## Side Handle

Side handle easily adjusts to provide a safe, ergonomic addition to any straight wand.



- Easily attaches to metal wands
- Fits wands up to 1/4"

Description	Part No.
Side Handle for Cold Water Wand	4-01207

## Flex Wand

Great for those hard-to-reach areas. Under eaves, gutter cleaning, the applications are endless! Keeps its shape even under pressure.



- Can bend to 90°
- 12" long
- 1/4" MPT solid x 1/4" FPT swivel

Length	PSI	Temp	Description	Part No.
12"	3000	190°F	Flex Wand	4-01109

## LANDA ZF Wand

This two piece wand fits the LANDA ZF unit.



Nozzle End



Gun End

Length	PSI	Temp	Description	Part No.
20"	2000	290°F	Nozzle End	4-0111429
10"	2000	290°F	Gun End	4-0111431

## Extend-A-Wand

Great new item that every user of telescoping wands will want to know about! This new revolutionary design is the fastest, most durable, hassle free, extension wand made!



- Quick pin lock adjustment collar – no thread to strip or jam
- Flat sided extension keeps nozzle in-line with trigger gun
- 390°F
- Aluminum with stainless steel hardware

Length	PSI	Hose Size	Part No.
6.5'	3000	1/4" Hose	4-0113663
9'	3000	1/4" Hose	4-0114593
12'	3000	1/4" Hose	4-0114123
18'	3000	1/4" Hose	4-0116183
24'	3000	1/4" Hose	4-0118243
6.5'	4000	1/4" Hose	4-0113664
9'	4000	1/4" Hose	4-0114594
12'	4000	1/4" Hose	4-0114124
18'	4000	1/4" Hose	4-0116184
24'	4000	1/4" Hose	4-0118244
Extend-a-Wand Gutter Cleaner Attachment			4-0113

### New

Also available with 3/8" hose for chemical injection. To Order 3/8" hose wand, simply add "38" to the part number and \$20.00 to the list price.

## Telescoping Fiberglass Wand

High quality telescoping wand reaches up to 24', 3 sizes to choose from. Lightweight and balanced under pressure.

- 6'-12' Wand shown
- 3000 psi
- Available up to 24'



Length	PSI	Temp	Description	Part No.
6'-12'	3000	200°F	Long!	4-011012
6'-18'	3000	200°F	Longer!!	4-011018
8'-24'	3000	200°F	Longest!	4-011024
Strap & Belt Shoulder Harness				4-011015
Pole Lock, Small, Replacement				89-1055
Pole Lock, Large Replacement				89-1054